



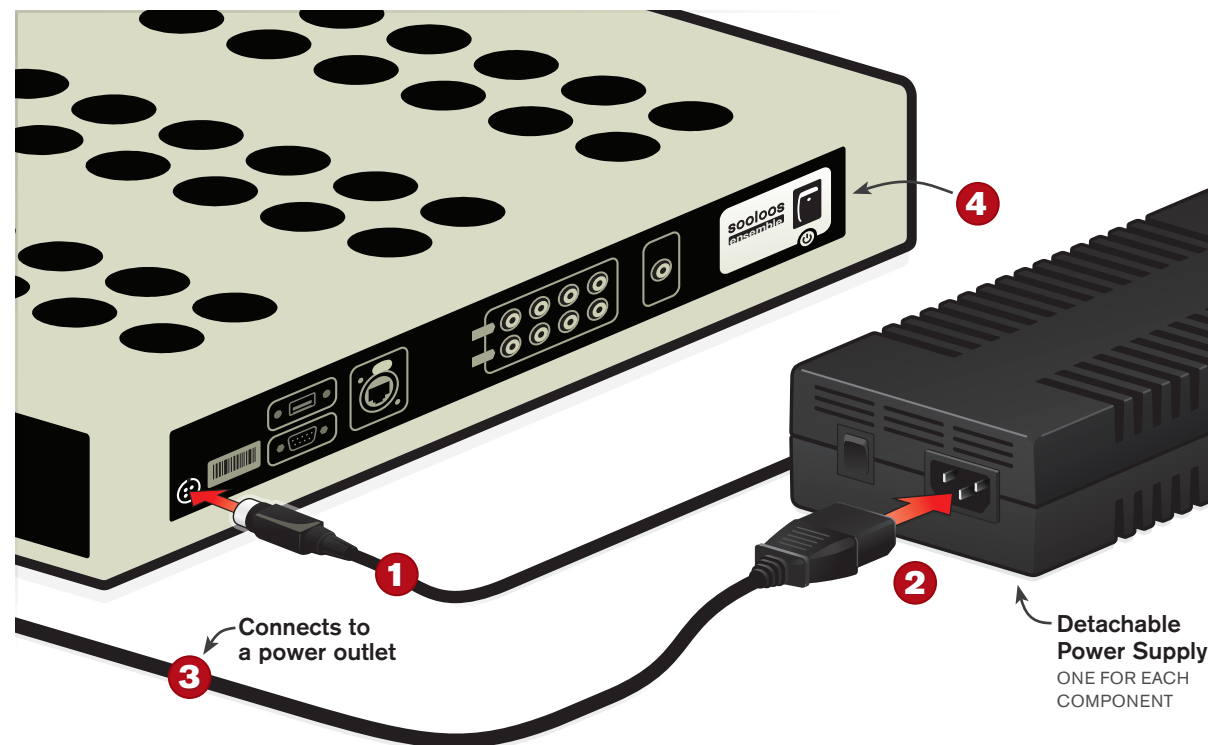


STEP 3: POWER CONNECTIONS

- 1 Connect the power supplies (provided) to the rear of each Ensemble and Control device.
 - 2 Connect an IEC power cable to each supply.
 - 3 Plug each power cable into a surge-protected power strip.
 - 4 Power-on each component by rocking its rear-panel power switch.
- ! All external power supplies are auto-sensing, and use universal voltage power supplies.
- ! Rackmount devices with internal power supplies are not auto sensing and must be set to the appropriate local voltage...

115 AC 115V NORTH AMERICA


230 AC 230V EUROPE, ASIA

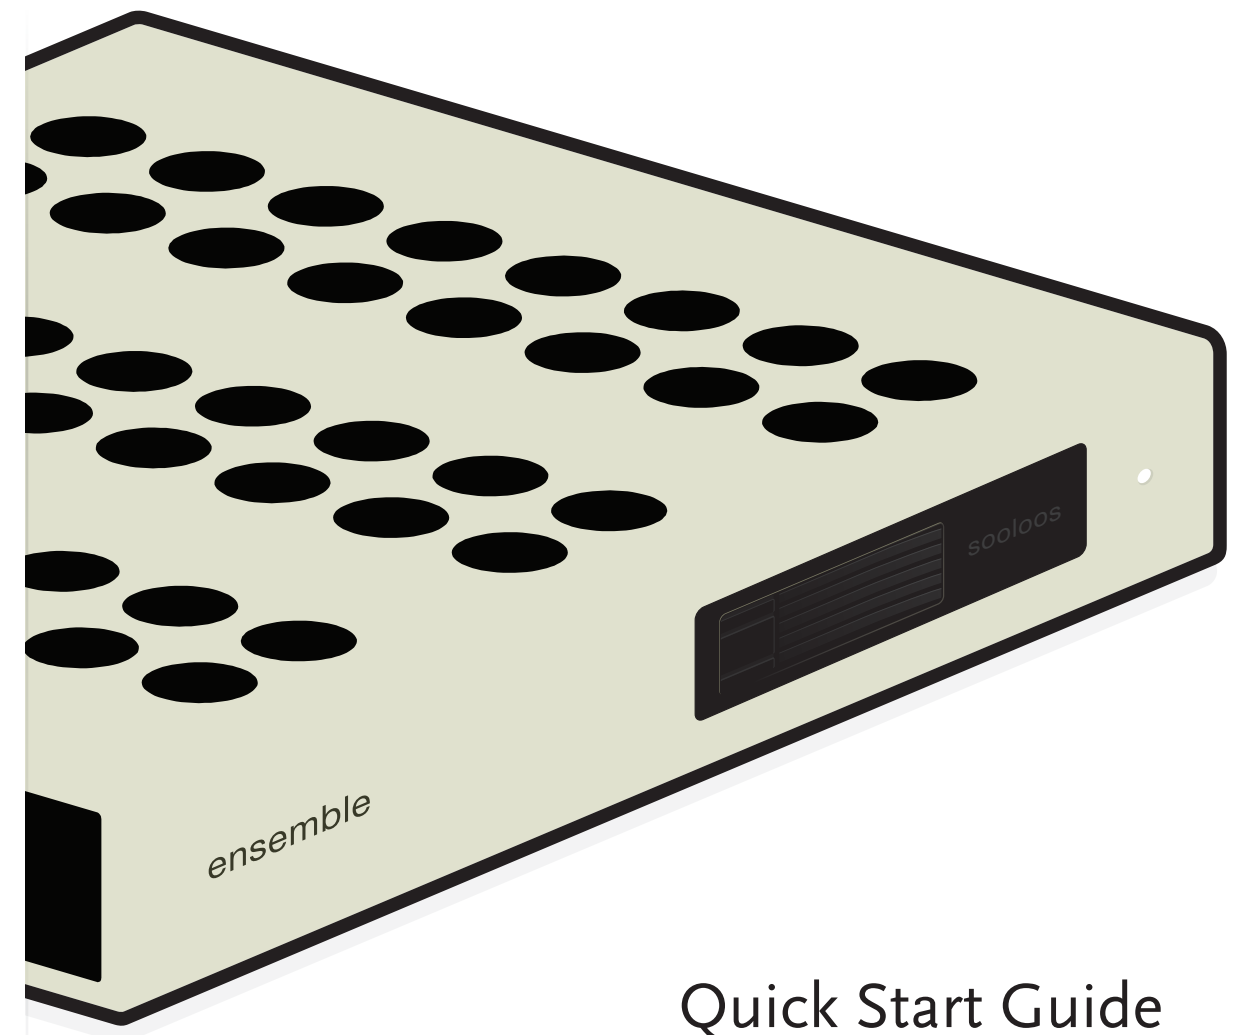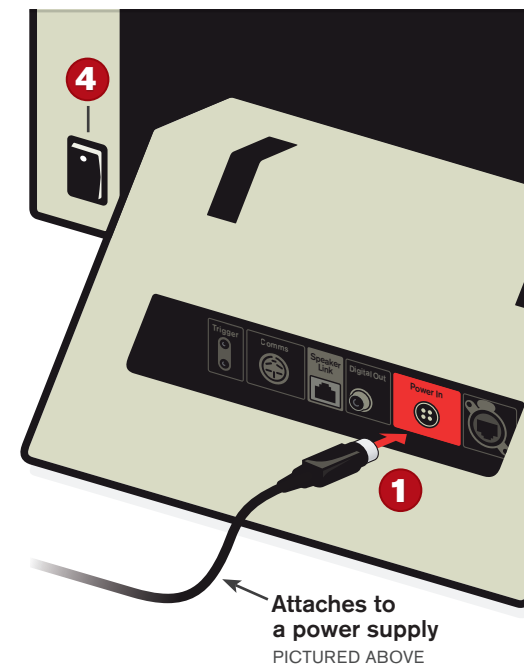

Quick Start Guide


FOR ENSEMBLE-BASED
MERIDIAN SOOLOOS SYSTEMS

Ensemble
Ensemble RM

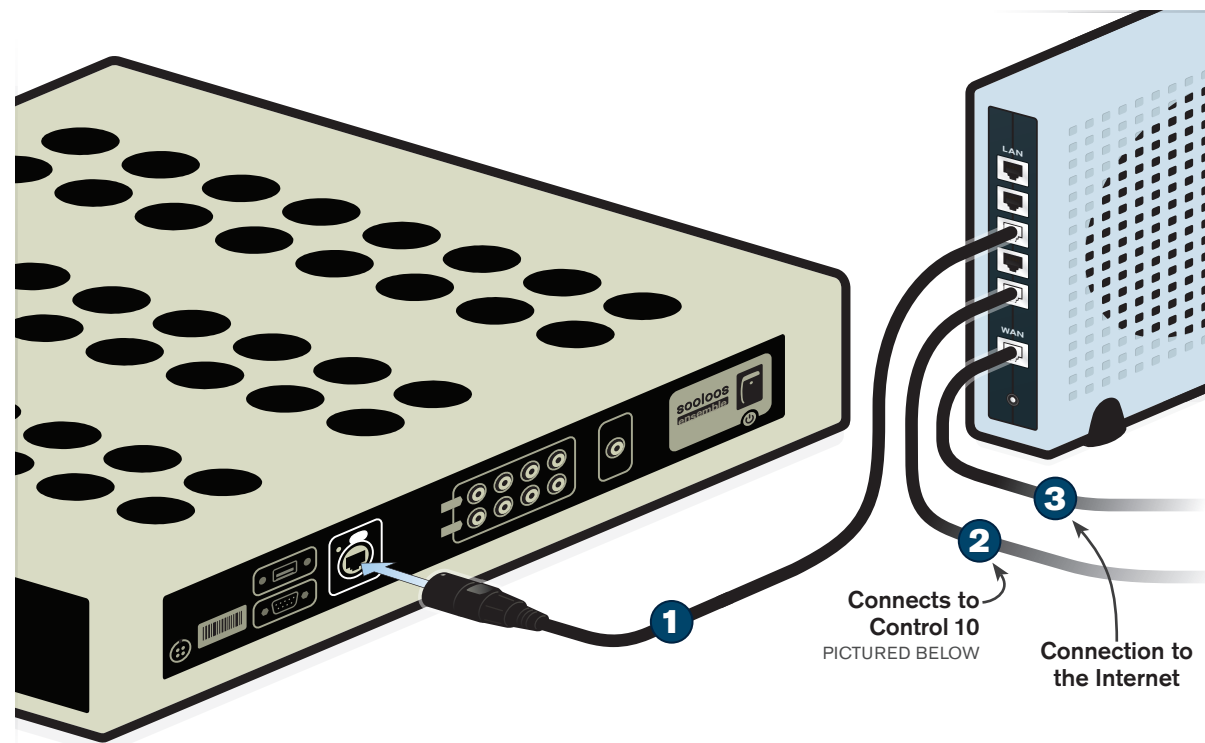

STEP 1: NETWORK CONNECTIONS

- 1 Attach the Ensemble's network port to a LAN port on your router. You can use the Neutrik Ethercon connector (supplied) with an Ethernet cable of the appropriate length (not supplied.)
 - 2 Attach the Control's network port to a LAN port on your router. You can use an additional Neutrik Ethercon connector with your own Ethernet cable here as well.
 - 3 Make sure the WAN/Internet port of this router connects to the rest of your network, or to your Cable/DSL modem.
- ! Depending on the make and model of your router, crossover Ethernet cable(s) may be required to make valid connections to your Ensemble and Control components.

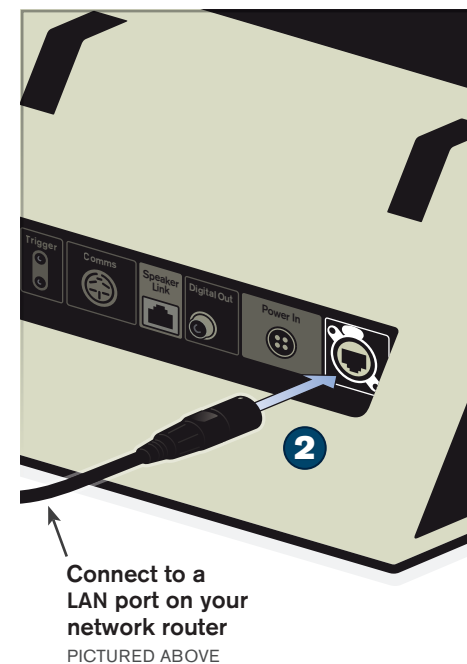

STEP 2: AUDIO CONNECTIONS

- 1 **Option 1:** Your Ensemble component features 4 stereo analogue outputs. Attach the output labelled "Zone 1" to an input on your audio system.
- 2 **Option 2:** Your Ensemble also features a single S/PDIF digital audio output. This connection is accessed as "Zone 5" in the on-screen interface and can be used as an alternative to the analogue outputs. Use a digital coaxial cable to connect this to an S/PDIF digital input on your audio system, or an S/PDIF digital input on Meridian Digital Active loudspeakers.
- 3 **Option 3:** Your Control 15 also features an S/PDIF digital audio output. This can be connected to an S/PDIF input on your audio system, or on Meridian Digital Active loudspeakers. The Control also includes a SpeakerLink output, which can be connected to Meridian Digital Active loudspeakers.

- A. S/PDIF digital audio output
- B. Meridian SpeakerLink audio output
- C. Meridian Comms (for integrating your Control 10 with a Meridian system)
- D. Meridian trigger and IR sensor inputs (included for future use)

- ! As a precaution, please lower the volume and/or power down any external audio components before making new audio connections.

