

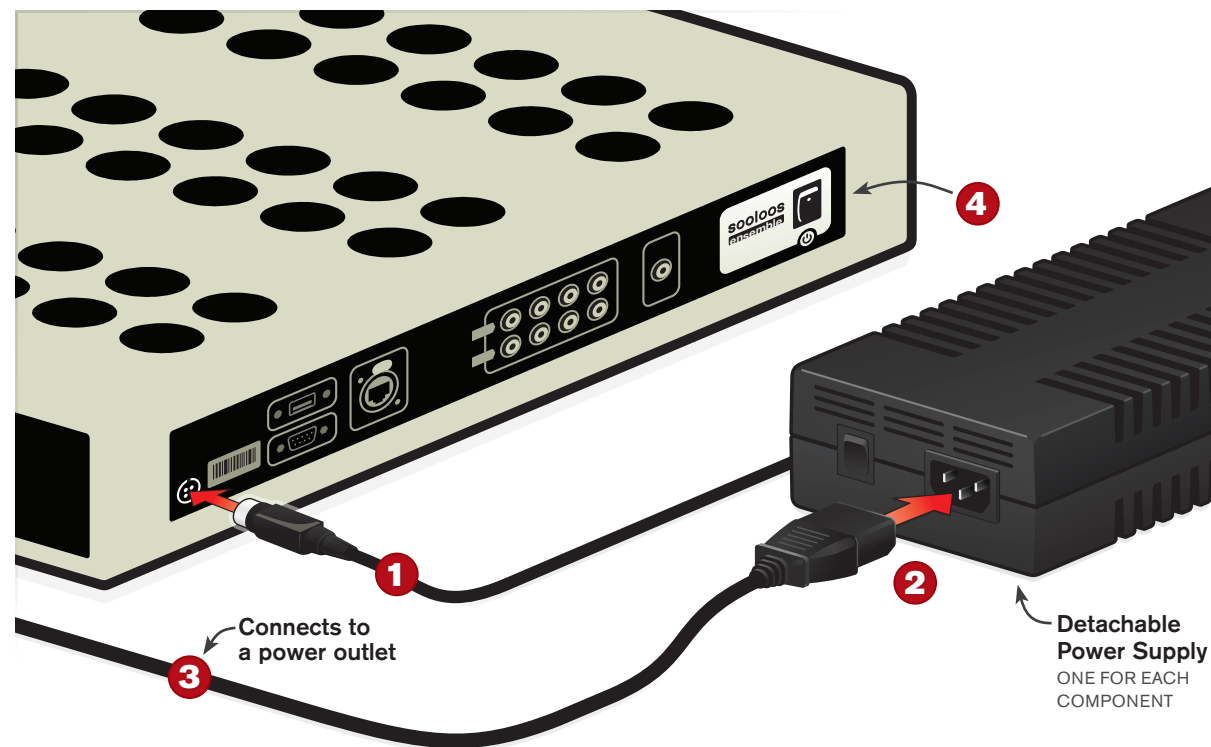


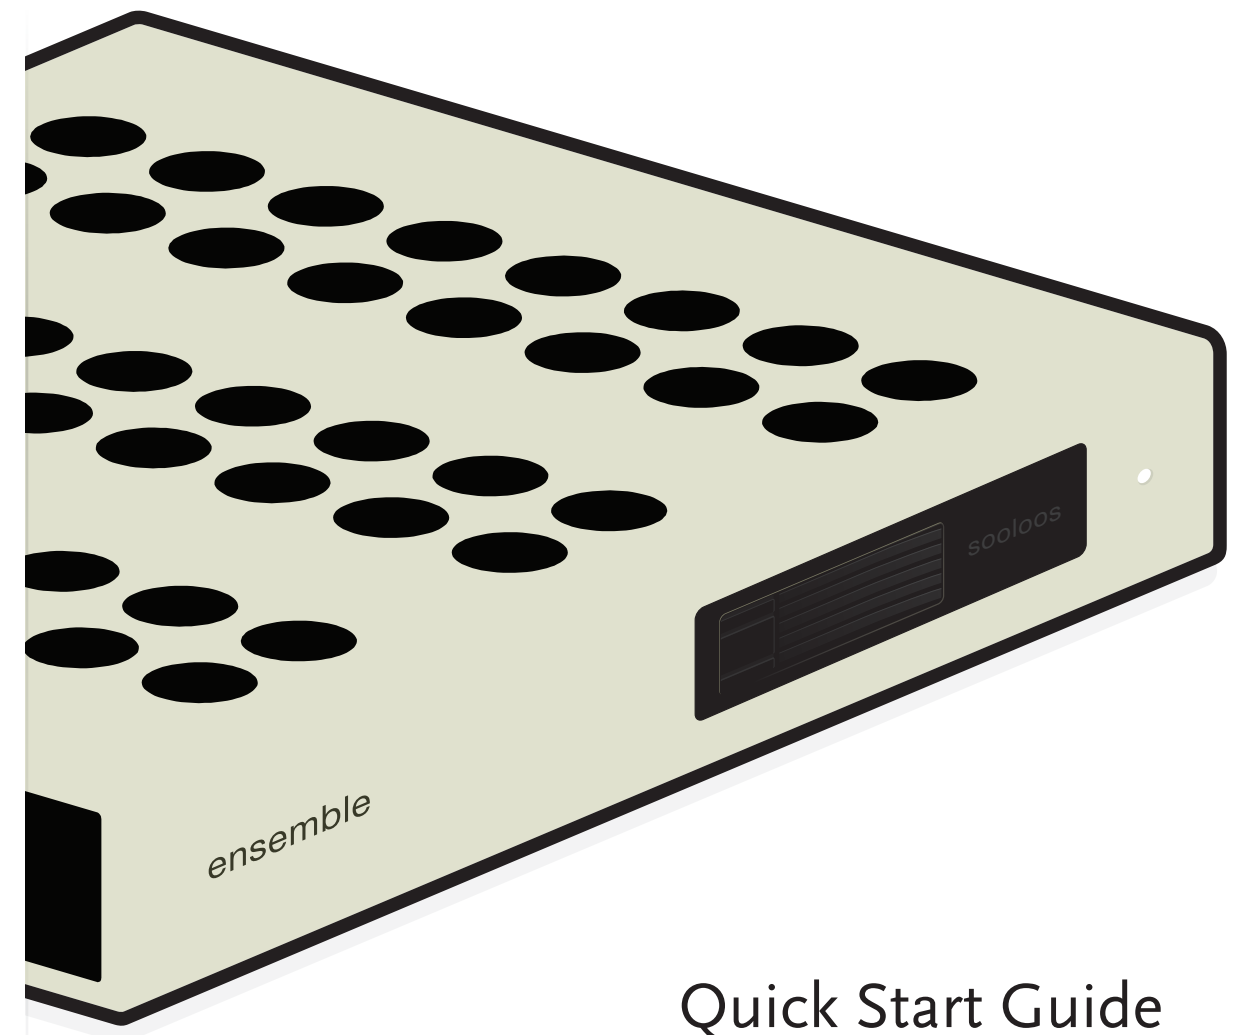

STEP 3: POWER CONNECTIONS

- 1 Connect the power supplies (provided) to the rear of each Ensemble and Control device.
 - 2 Connect an IEC power cable to each supply.
 - 3 Plug each power cable into a surge-protected power strip.
 - 4 Power-on each component by rocking its rear-panel power switch.
- ! All **external** power supplies are auto-sensing, and use universal voltage power supplies.
 - ! Rackmount devices with internal power supplies **are not auto sensing** and **must** be set to the appropriate local voltage...


115 AC 115V NORTH AMERICA
230 AC 230V EUROPE, ASIA

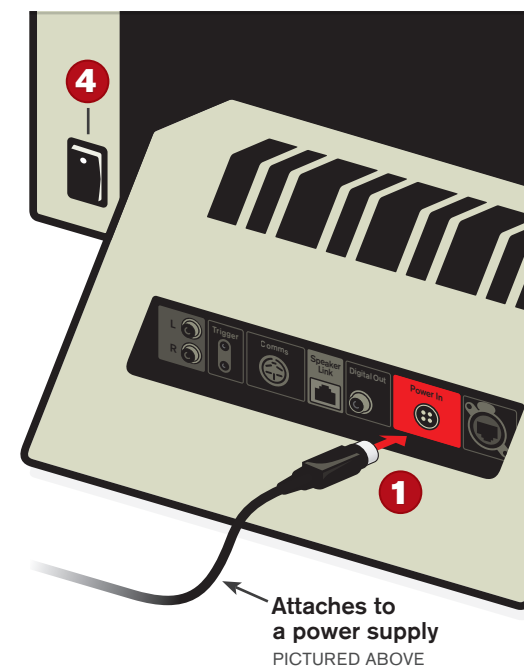

Quick Start Guide


FOR ENSEMBLE-BASED
MERIDIAN SOOLOOS SYSTEMS

Ensemble
Ensemble RM

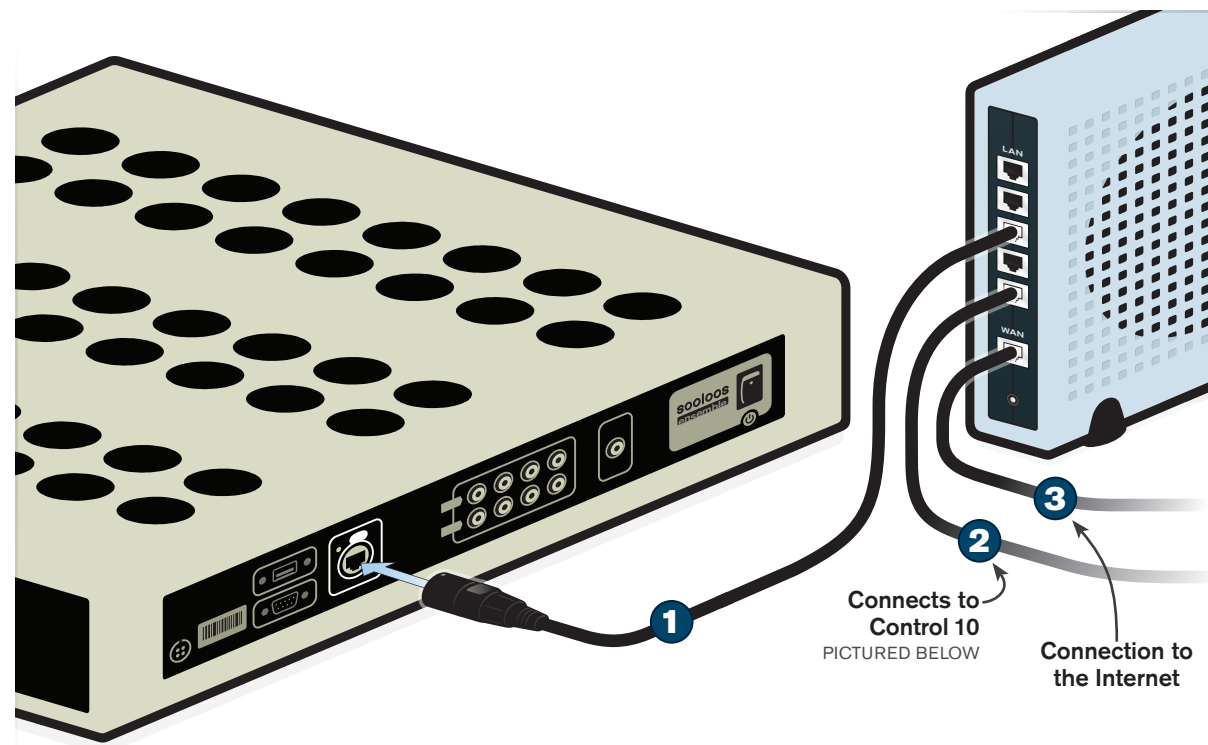

STEP 1: NETWORK CONNECTIONS

- 1 Attach the Ensemble's network port to a LAN port on your router. You can use the Neutrik Ethercon connector (supplied) with an Ethernet cable of the appropriate length (not supplied.)
 - 2 Attach the Control's network port to a LAN port on your router. You can use an additional Neutrik Ethercon connector with your own Ethernet cable here as well.
 - 3 Make sure the WAN/Internet port of this router connects to the rest of your network, or to your Cable/DSL modem.
- ! Depending on the make and model of your router, crossover Ethernet cable(s) may be required to make valid connections to your Ensemble and Control components.

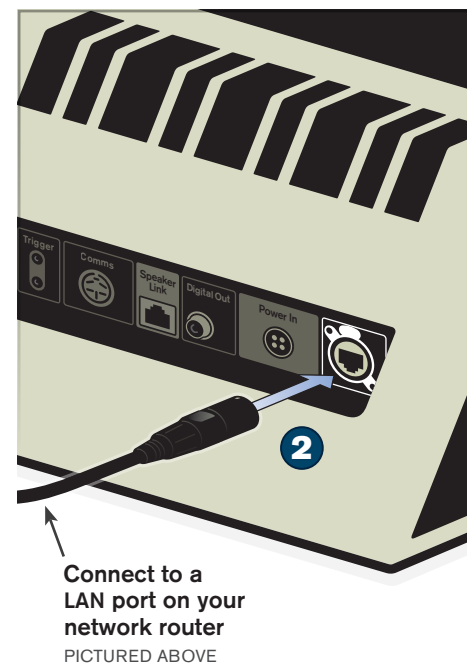

STEP 2: AUDIO CONNECTIONS

- 1 **Option 1:** Your Ensemble component features 4 stereo analogue outputs. Attach the output labelled "Zone 1" to an input on your audio system.
- 2 **Option 2:** Your Ensemble also features a single S/PDIF digital audio output. This connection is accessed as "Zone 5" in the on-screen interface and can be used as an alternative to the analogue outputs. Use a digital coaxial cable to connect this to an S/PDIF digital input on your audio system, or an S/PDIF digital input on Meridian Digital Active loudspeakers.
- 3 **Option 3:** Your Control 10 also features an S/PDIF digital audio output. This can be connected to an S/PDIF input on your audio system, or on Meridian Digital Active loudspeakers. The Control 10 also includes a SpeakerLink output, which can be connected to Meridian Digital Active loudspeakers.

- A. S/PDIF digital audio output
- B. Meridian SpeakerLink audio output
- C. Meridian Comms (for integrating your Control 10 with a Meridian system)
- D. Meridian trigger and analogue inputs (included for future use)

- ! As a precaution, please lower the volume and/or power down any external audio components before making new audio connections.

