



Control:Bridge RM

The Control:Bridge provides all the features of the Control 10, but allows you to display the user interface on your Crestron panel, so you can enjoy the Sooloos experience anywhere you have a compatible device.* The rackmountable Control:Bridge works by providing a video feed of the user interface which is routed to your panel. In turn, touch information is captured and sent back to the Control:Bridge via IP or RS-232.

**Please contact Sooloos at support@sooloos.com for a current list of compatible models.*

RM Technical Specifications:

Dimensions:

432 x 88 x 229mm / 16.7 x 3.5 x 9in (WHD)

Weight: 5.8kg (12.8lb)

Video Connections: VGA, DVI, and Component

Control Connections: RS-232 Serial

Network Connections:

1 network connection, RJ-45 or Neutrik EtherCon


Power Connections:

115V/230V switchable

Removable IEC 3-prong power cable

Cooling: Internal fan

DETAIL OF THE REAR CONNECTION PANEL:

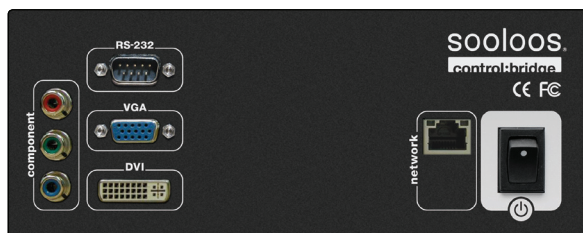

Compatible with:

