

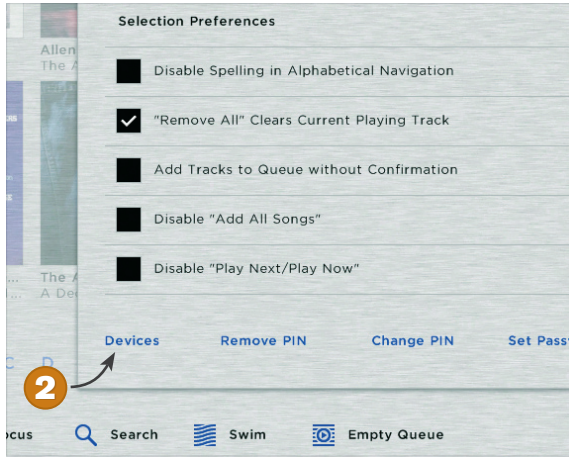
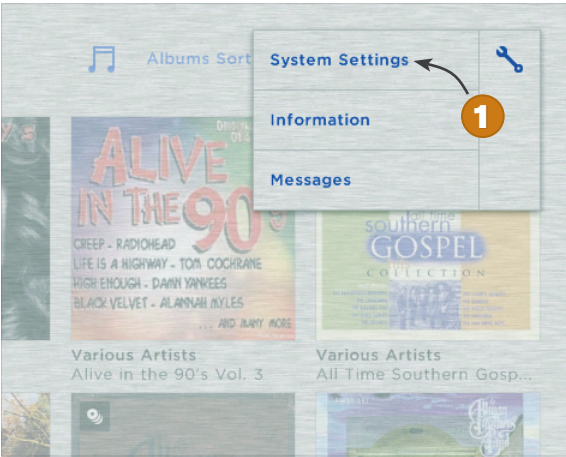


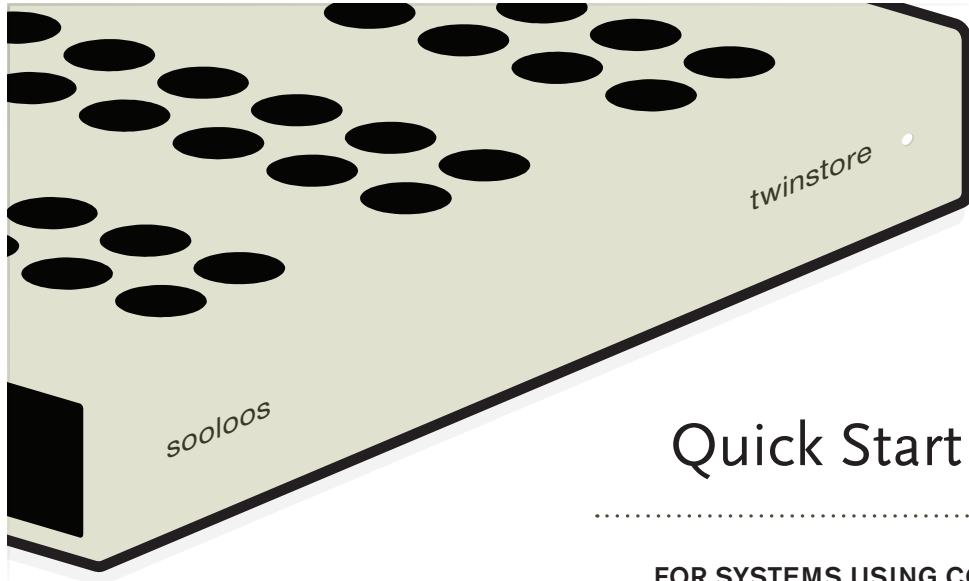

STEP 4: SYSTEM SETTINGS

! By default, a Sooloos Ensemble or Source acts as the System Core. In this system, you must set the Control 15 to act as the System Core, by following the steps below.

- 1 Tap Settings Icon in the upper right corner of the Cover Browser and tap "System Settings"
- 2 On the Settings page, tap "Devices" (located in the lower left-hand corner) and then tap the "Confirm" button
- 3 On the Devices page, tap "Control 15"
- 4 On the Control 15 Device Configuration page, check the box next to "System Core"
- 5 Tap "Apply Settings"

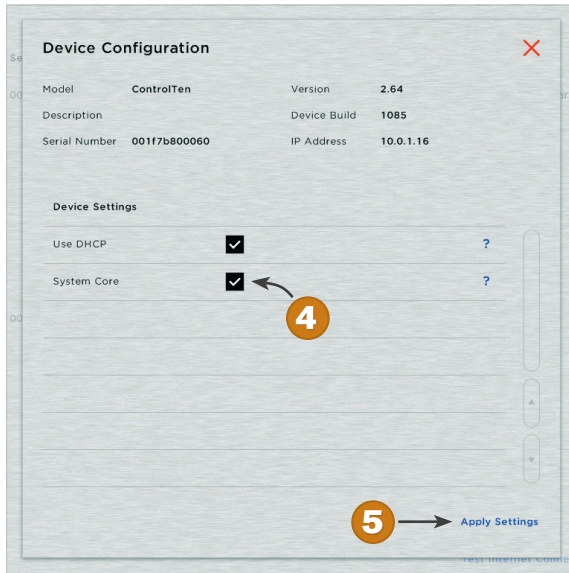


Quick Start Guide


FOR SYSTEMS USING CONTROL 15 AS
A PRIMARY SOURCE COMPONENT

(Control 15 + Twinstore)

STEP 1: AUDIO CONNECTIONS



- 1 Your Control 15 features a S/PDIF digital audio output. This can be connected to an S/PDIF input on your audio system, or on Meridian Digital Active loudspeakers. The Control 15 also includes a SpeakerLink output, which can be connected to Meridian Digital Active loudspeakers.
- A. S/PDIF digital audio output
 - B. Meridian SpeakerLink audio output
 - C. Meridian Comms (for integrating your Control 15 with a Meridian system)
 - D. Meridian trigger out and IR in (included for future use)
- ! As a precaution, please lower the volume and/or power down any external audio components before making new audio connections.

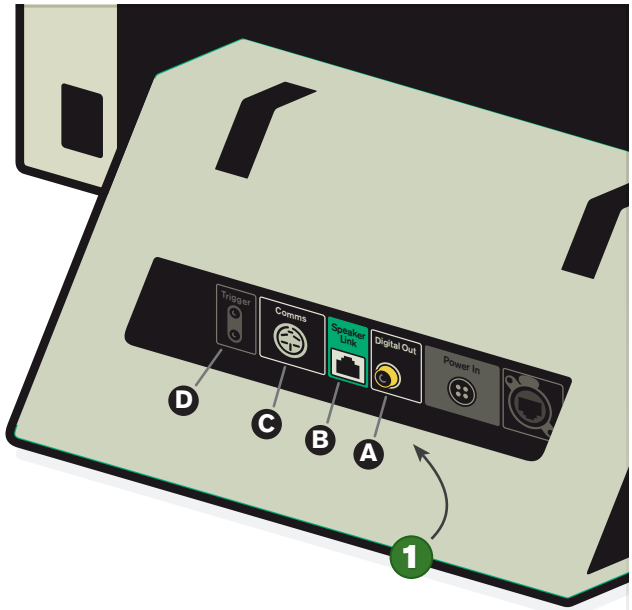

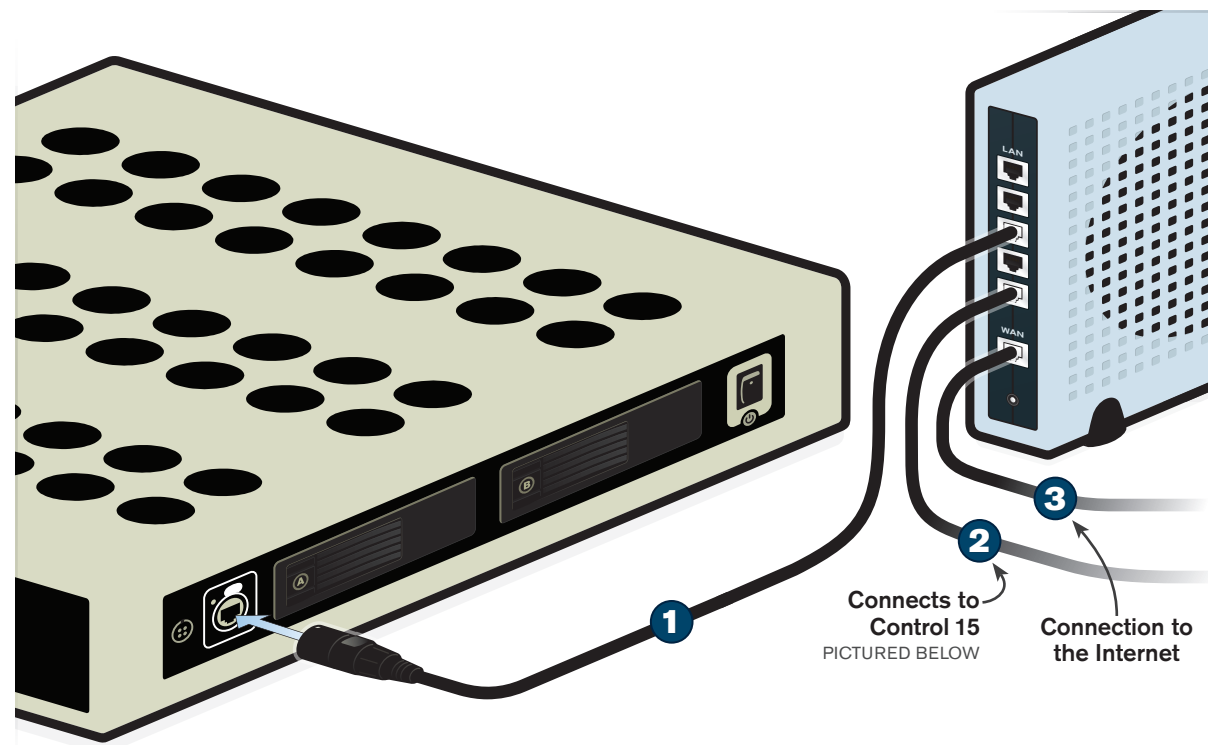

STEP 2: NETWORK CONNECTIONS

- 1 Attach the Twinstore's network port to a LAN port on your router. You can use the Neutrik Ethercon connector (supplied) with an Ethernet cable of the appropriate length (not supplied.)
- 2 Attach the Control's network port to a LAN port on your router. You can use an additional Neutrik Ethercon connector with your own Ethernet cable here as well.
- 3 Make sure the WAN/Internet port of this router connects to the rest of your network, or to your Cable/DSL modem.
- ! Depending on the make and model of your router, crossover Ethernet cable(s) may be required to make valid connections to your Ensemble and Control components.

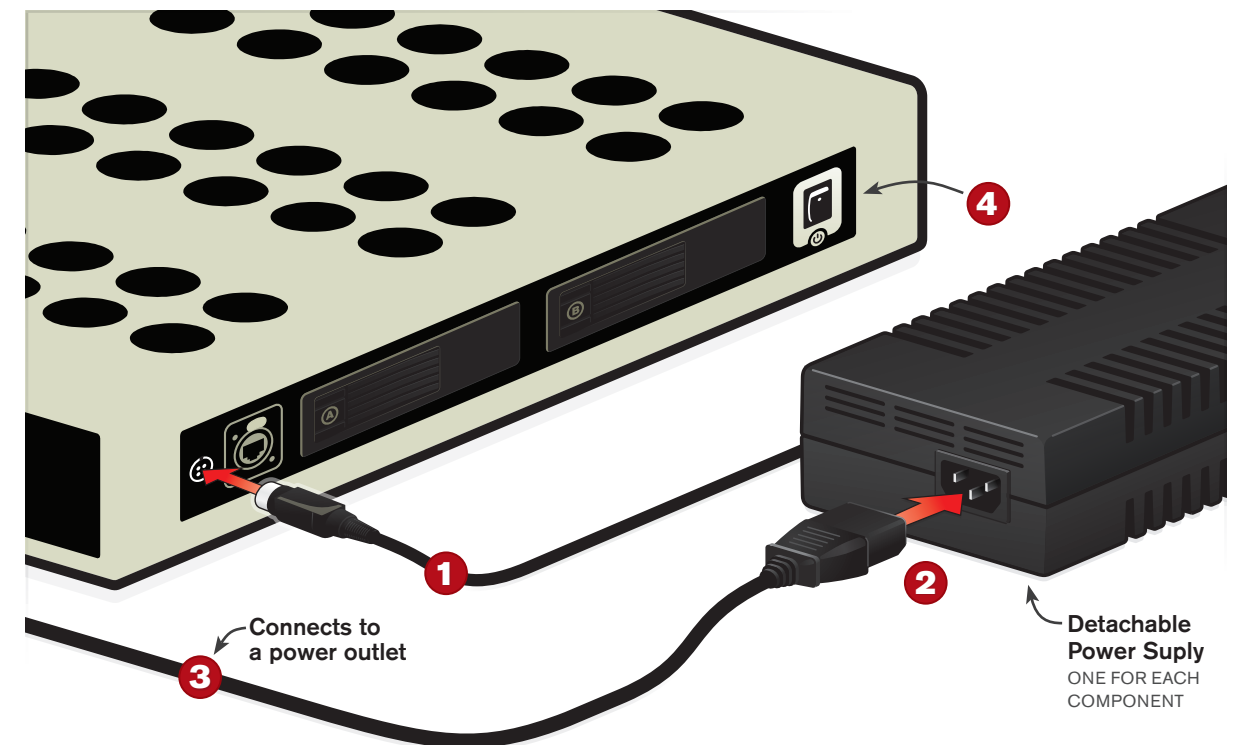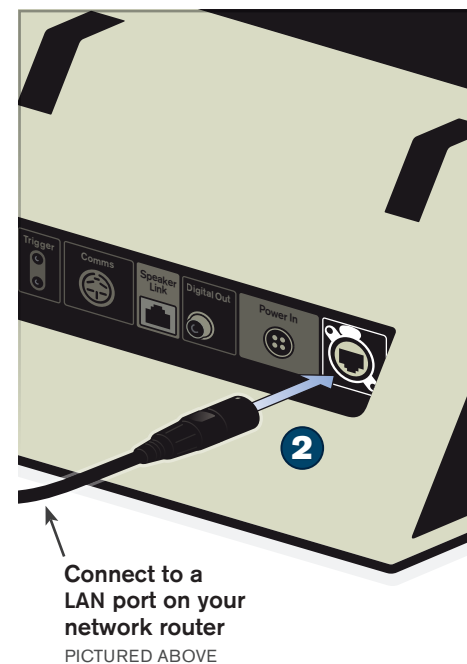

STEP 3: POWER CONNECTIONS

- 1 Connect the power supplies (provided) to the rear of each Ensemble, and Control device.
- 2 Connect an IEC power cable to each supply.
- 3 Plug each power cable into a surge-protected power strip.
- 4 Power-on each component by rocking its rear-panel power switch.
- ! All external power supplies are auto-sensing, and use universal voltage power supplies.
- ! Rackmount devices with internal power supplies are not auto sensing and must be set to the proper local voltage...

115 AC 115V
NORTH AMERICA

230 AC 230V
EUROPE, ASIA

