


M E R I D I A N G S E R I E S S Y S T E M G U I D E



BOOTHROYD STUART
MERIDIAN

M E R I D I A N G S E R I E S S Y S T E M G U I D E

Copyright and acknowledgements

Sales and service in the UK

Meridian Audio Ltd
Stonehill
Stukeley Meadows
Cambridgeshire
PE29 6EX
England

Tel +44 (0)1480 445678
Fax +44 (0)1480 445686

World Wide Web – <http://www.meridian-audio.com/>

Copyright © 2003 Meridian Audio Ltd

Designed and manufactured in the UK by Meridian Audio Ltd. Meridian Audio reserves the right to make changes and improvements to any of the products described in this document without prior notice.

Some products include elements that are manufactured under license from Dolby Laboratories Licensing Corporation (Canadian patent 1,037,877), Lucasfilm Ltd. (US patents 5,043,970; 5,189,703; 5,222,059. European patent 0323830), Trifield Productions Ltd, and Nimbus Records Ltd.

MHR: This product incorporates copyright protection technology covered by certain patent applications and intellectual property of Meridian Audio Ltd. This technology is provided for the express purpose of securely containing copyright audio within the Meridian System only. Reverse engineering or circumvention of this protection is strictly prohibited.

Part no:GS/1

Sales and service in the USA

Meridian America Inc
3800 Camp Creek Parkway
Building 2400
Suite 122
Atlanta GA
30331

Tel +1 (404) 344 7111
Fax +1 (404) 346 7111

Dolby, Dolby Digital, Pro Logic, AC-3, PLII, PLIIx, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation. Lucasfilm, THX, and THX Cinema are registered trademarks of Lucasfilm Ltd. Surround EX is a jointly developed technology of THX and Dolby Laboratories, Inc and is a trademark of Dolby Laboratories, Inc. All rights reserved. Used under authorisation. DTS is a registered trademark of Digital Theatre Systems Inc. MPEG is a registered trademark of the MPEG organisation. Ambisonic is a registered trademark of Nimbus Records Ltd. Trifield is a trademark of Trifield Productions Ltd. LaserDisc is a trademark of Pioneer Electric Corp. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. Boothroyd|Stuart Meridian, Meridian, Meridian Digital Theatre, MHR, MLP, and LipSync are registered trademarks of Meridian Audio Ltd.

This guide was produced by: Human-Computer Interface Ltd,
<http://www.interface.co.uk/>

Contents

Contents

Introduction	1	Playing DVD-Video discs	21
Describes the G Series range and illustrates some typical system configurations		Explains how to play DVD-Video discs on the G Series DVD players.	
Welcome	2	Home Playing DVD-Video discs	22
Typical configurations	3	More Fast and slow-motion playback	23
		More Displaying and exiting from menus	24
Basic use	5	More Selecting options from a menu	25
Describes the basic operation of the G Series products, using the front panel or the MSR+.		More Selecting the audio soundtrack and repeat playback	26
Operating your G Series system	6	More Changing the camera angle and subtitles	27
Using the MSR+	7	Display	28
		Playing DVD-Audio discs	29
Using a preamplifier	9	Describes how to use the G Series DVD players to play DVD-Audio discs, which provide a range of benefits over audio CDs.	
Explains how to select sources and control their volume, using a preamplifier or receiver.		Menu keys Playing DVD-Audio discs	30
Home Selecting sources	10	More Controlling DVD-Audio discs	31
		Display	32
Playing CDs	11	Digital surround processing	33
Provides information about playing audio CDs on your G Series CD player or DVD player.		Explains how to use your G Series digital surround controller.	
Home Playing CDs	12	Home Selecting a source and changing the DSP preset	34
More Repeat and fast scan	13	DSP presets	35
More Programming a selection	14	More Changing DSP parameters	36
Display	15	DSP parameters	37
		Display	38
Using the radio tuner	17	Glossary	39
Explains how to use the radio tuner, which is available with the G01 Control Unit, G51 Receiver, G68 Digital Surround Controller, and G91 DVD Audio Player Controller Tuner.		Index	41
Home Selecting a station	18		
More Tuning manually and defining preset stations	19		
Display	20		

Introduction

Welcome to the Meridian G Series – a range of extremely advanced audio products designed to work together in a single integrated system. This *System Guide* provides information about operating your G Series system, whatever the particular combination of units it includes.

Welcome

All the G Series products work in a similar way, and this guide gives general information about switching units on and off and selecting functions from the front panel or Meridian System Remote (MSR+). It also provides information about using specific products in the G Series, including the CD player, integrated tuner, DVD player, and digital surround controller.

For information about setting up your G Series products refer to the separate *Installation Guide* provided with each product.

The Meridian G Series

Taking technologies from the top-of-the-line 800 Series and adding new features and possibilities that are completely unique, Meridian's G Series represents a pinnacle of development from the world's premier hi-fi manufacturer.

All G Series units have the same footprint, and are built into an elegant enclosure suitable for free-standing operation. Alternatively kits are available for rack mounting. All units can be supplied either in traditional Meridian black or in a sleek silver finish.

G Series units are easy to use. The units all feature a similar user interface, based around an easy to read fluorescent display. The positive-action front-panel keys are software-defined, their current function shown in the display. Where appropriate, G Series units also feature a rotary volume control.

The G Series is accompanied by a comprehensive multifunction MSR+ remote control with automatic backlighting. In addition to the ability to control all Meridian components, the remote can be programmed to control virtually any other remote-controlled device, via its learning capability or its extensive on-board command library.

Full configuration of many G Series components may be achieved by running a special set-up program on a Windows computer, connected to the G Series unit via a serial link.

Construction

Inside, the Meridian G Series is as advanced as its appearance suggests. G Series components incorporate the latest technologies and techniques, and many unique features. Many components feature a combination of functionality. For example, AM/FM tuner capability is included in selected models. Many G Series components are upgradeable with new firmware and hardware as new developments are made and new industry standards emerge.

The G Series range

The Meridian G Series range includes CD and DVD-Audio/Video players, controllers, processors, and power amplifiers. Some units include comprehensive video processing and the latest interfacing – such as high-resolution HDMI connectors – and some incorporate the ability to transfer full-resolution, high-sample-rate digital signals from player, to processor, to digital loudspeaker via Meridian's unique MHR SmartLink. Often, components are available with either digital or analogue outputs, and while G Series components are a perfect match for our range of DSP loudspeaker products, they can also be used with conventional passive loudspeakers, driven by the G Series stereo and multichannel power amplifiers.

Highest possible audio quality

The G Series continues the Meridian tradition of the highest possible audio quality, implemented via a combination of the latest and most sophisticated digital and analogue circuitry, and with a distinctive appearance that looks just as good as it sounds.



Typical configurations

This section shows some recommended G Series systems.


Compact DVD system



The Meridian G91 DVD Audio Player Controller Tuner incorporates a radio tuner and preamplifier with digital, analogue, and video inputs, making it ideal as the basis for a complete compact system.

It can be connected directly to a pair of Meridian DSP loudspeakers, such as Meridian DSP7000s, to create a complete stereo system with no additional components.

Integrated Analogue System

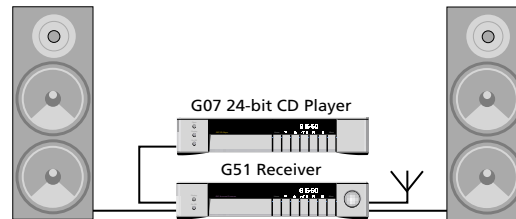


The G51 Receiver combines an analogue preamplifier with a two-channel power amplifier, making it ideal as the basis for a complete compact music system in conjunction with a pair of passive loudspeakers.

The G51 includes an integrated tuner to provide FM and AM radio, and the G07 is ideal as a CD player for the system.




Balanced analogue system

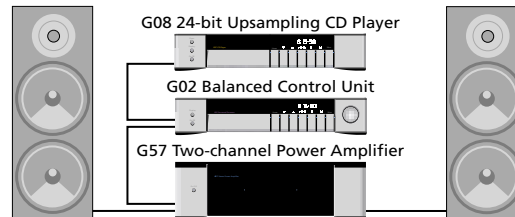

The G02 Balanced Control Unit provides balanced outputs, making it the heart of a superb quality analogue system. The G57 Two-channel Power Amplifier is an ideal companion to the

G02 to provide a generous 200W per channel to drive passive loudspeakers. The G08 24-bit Upsampling CD Player is an excellent source for use with the G02, giving a fully balanced system.

Meridian Digital Theatre

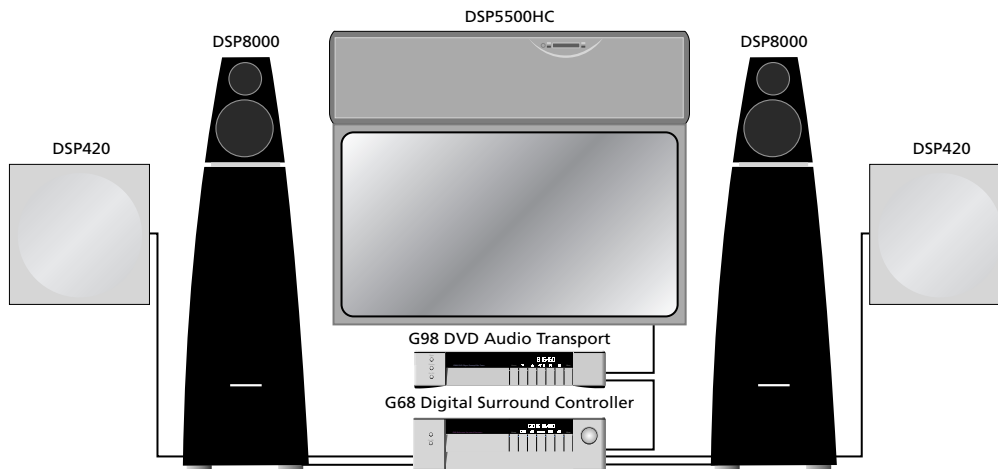

The G68 Digital Surround Controller can be used with Meridian digital loudspeakers, such as DSP8000s and a DSP5500HC centre speaker, to provide audiophile quality sound. A further two or four speakers, such as DSP420 Digital Loudspeakers, can be added as side or rear loudspeakers to give excellent multichannel reproduction from music and movie sources.

Alternatively, the G55 Five-channel Power Amplifier can be added to the system for use with five passive loudspeakers. The G98 DVD Audio Transport is an ideal source for use with the G68. It plays DVD-Video and Audio discs, as well as audio CDs and MP3 CD-ROMs, and provides high-quality video routing and scaling.

Basic use

This chapter describes the basic operation of the G Series products, using the front panel or MSR+.


Operating your G Series system

This section gives information about switching your G Series system on and off, using the soft keys, and changing the display format.

The five soft keys under the display make the G Series products particularly easy to use. They change to reflect what the product is doing. For example, if you are playing a CD they provide Play, Stop, Pause, Previous, and Next commands. The current function of each key is shown above the key on the bottom line of the display.

This initial set of soft keys is called Home. You can get back to it at any time by pressing **Home**, to the left of the soft keys.

You can display additional, less frequently needed commands by pressing **More** to the right of the soft keys. The more complex products have several sets of soft keys and pressing **More** steps between the sets.

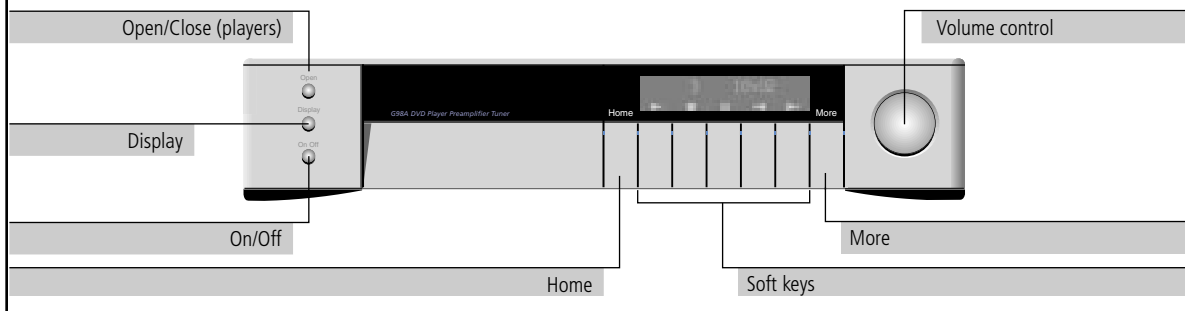

On/Off

To switch on from standby

- Press **On/Off**.

Alternatively select a source using the MSR+.

To switch to standby

- Press **On/Off** or **OFF** on the MSR+.

Display

To change the display format

- Press **Display**.

The display will step through a series of alternative display formats, depending on what is currently playing.

To blank the display

- Press **Display** until you reach the blank display option.

Blanking the display also switches off all the display circuitry.

Home

To display the Home soft keys

- Press **Home**.

Products which combine two or more functions, eg tuner and preamplifier, provide a set of Home soft keys appropriate to each function.

- Press **Home** to switch between the alternative sets of Home soft keys.

Soft keys

To select a command

- Press **More** until the command you want is displayed above the soft keys.
- Press the soft key corresponding to the command.

If you do not select a command after a few seconds, the soft keys revert to the Home soft keys.

More

To access more soft key commands

- Press **More**.

An example is the brightness command.

To change the display brightness



- Press **More** until the display shows **—Bright+—**.
- Press **—Bright** or **Bright+** to decrease or increase the display brightness.
- Press **Home** to return to the Home soft keys.


Using the MSR+

You can control all of the functions of your G Series products using either the front-panel controls, or the MSR+ remote control provided with the products.

This page summarises the commands available from the remote. To access the secondary commands, shown in blue on some keys, hold down the **Function** key in the lower left corner and press the key.

For information about programming the remote to control the other equipment within your system please refer to the *MSR+ User Guide*, supplied separately.

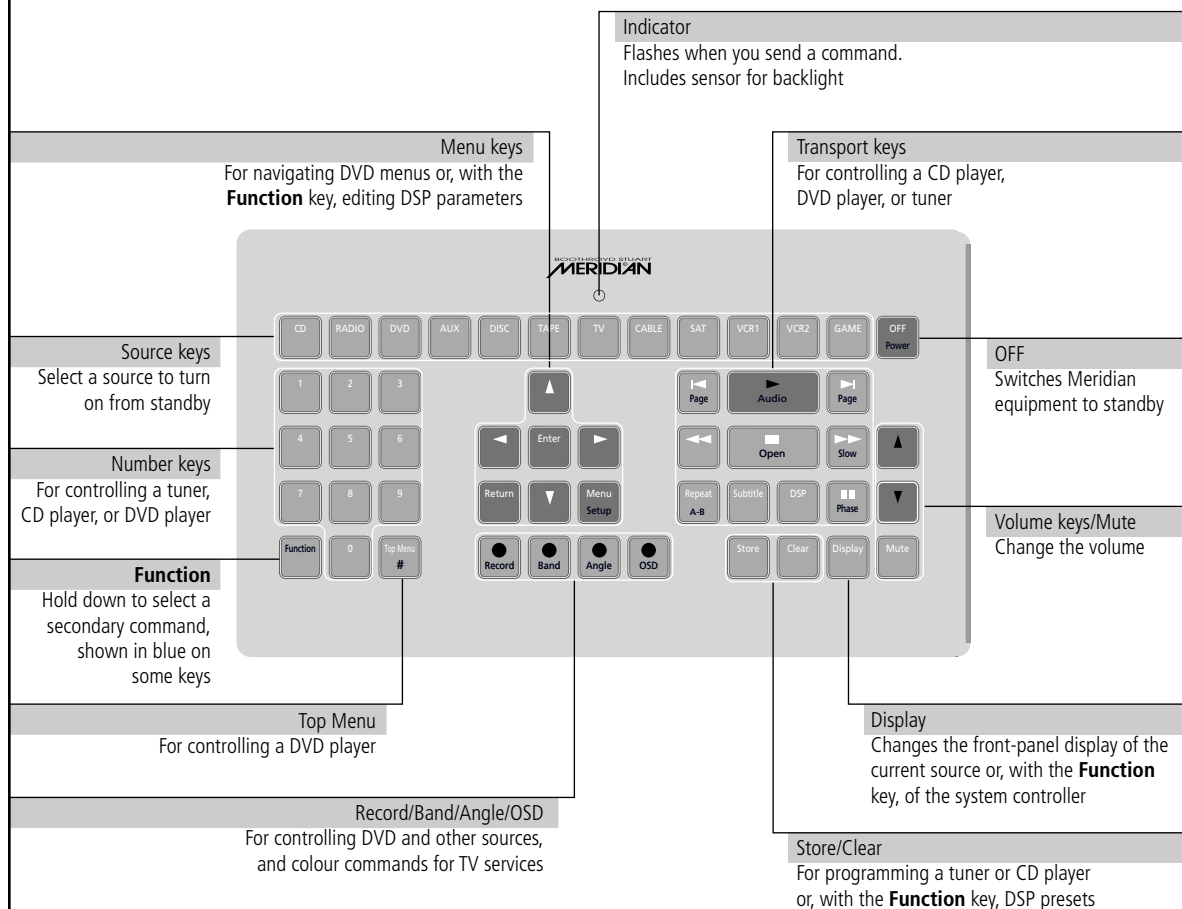



Using a preamplifier

This chapter explains how to select sources and control their volume using a preamplifier or receiver.

Home Selecting sources

The G Series controllers provide up to 12 sources initially labelled: **CD, RADIO, DVD, AUX, DISC, TAPE, TV, CABLE, SAT, VCR1, VCR2, and GAME.** You can configure the names of each source to

suit the other equipment in your system; see the *G Series Control Unit and Receiver Installation Guide*.

- Press **Home** to display the soft keys for selecting a source.

Source					Volume				
CD					65				
CD	Radio	TV	VCR1	Copy					

Sources

To select a source

Either:

- Press the appropriate source key on the MSR+.

Or:

- Press the soft key corresponding to the source.

You may need to press **More** until the source you want is displayed.

Volume

To change the volume

- Turn the volume control.

You can adjust the volume between 1dB and 99dB in precise steps of 1dB, where 9dB is equivalent to doubling the loudness.

As you adjust the volume the display may change to show the currently selected source and current volume:

DVD 76

To mute the sound

- Press the volume control.

The display will show:

Mute

To restore the sound

- Press the volume control again, or adjust the volume.

To mute the speakers without muting the headphones (G51 only)

- Press **More** until **Spkr** is displayed.
- Press **Spkr** to turn the speakers off.

Balance

To change the balance

- Press **More** until **<Bal.** and **Bal.>** are displayed.
- Press **<Bal.** or **Bal.>**.

As you change the balance the display shows how far you have moved the sound field, and the direction:

Bal. <4

To restore centre balance

- Adjust the balance until the display shows:

Bal. <0>

Copy

To copy a source to the Copy outputs

- Press **Copy** until the display shows the source you want to copy. For example:

C. Radio

C. Source copies the current source, and **C. Mute** mutes the copy outputs.



Playing CDs

This chapter explains how to play audio CDs on your G Series CD player or DVD player.

The CD player and DVD player will play audio CDs, recordable CDs, and MP3 CD-ROMs (except G07).

For information about playing DVD-Audio discs see *Playing DVD-Audio discs*, page 29.

Home Playing CDs

The CD player and DVD player allow you to play an entire CD, or start playing from any track. While a disc is playing you can go back to the start of the track or skip to the start of the next track.

If you have programmed a selection, these functions also work with the selection of tracks you have programmed. For information about programming see *Programming a selection*, page 14.

- With a CD in the tray press **Home** to display the soft keys for playing CDs. With a G91 select the **DVD** source first.

Track number	Elapsed disc time			
3	10:02			
				

Play/Skip

To play the disc

- Press ►.

To skip to the next track

- Press ► while the disc is playing.

The display shows:



Stop

To stop playback

- Press ■.

Pause/Resume

To pause playback

- Press ||.

Depending on the current display format the display shows **PS** or **Pause**:



You can change tracks while the disc is paused using ◀ or ▶.

To resume playback

- Press || or ►.

Previous/Next

To play from a particular track


- Press ◀ or ▶ to step through the track numbers, or enter the track number using the MSR+.

The display shows which track you are selecting; for example:



- Press ► to start play immediately.

Alternatively, after a short delay the disc will start to play from the track you have selected.



More Repeat and fast scan

You can choose to play a track, disc, or selection repeatedly, so that when it has played, it will start again from the beginning; with MP3 discs you can also repeat the current album.

You can also scan through a disc at faster than normal speed to rapidly locate a particular position on the disc.

- Press **More** to display the soft keys for repeat and fast play.



Play

To revert to normal speed play

- Press **▶**.

Repeat

To repeat the current track

- Press **Repeat**.

The display shows:



To repeat the disc

- Press **Repeat** again.

The display shows:



To cancel repeat

- Press **Repeat** until the repeat indicator disappears.


With MP3 discs you can press **Repeat** again to repeat the album.

Pause

To pause playback

- Press **||**.

Depending on the current display format the display shows **PS** or **Pause**:



You can fast scan forward or reverse from pause.

To resume playback

- Press **||** or **▶**.

Fast scan reverse/forward

To scan at twice normal speed

- Press **◀◀** for reverse or **▶▶** for forward.

The display shows:



To scan at eight times normal speed (not G07)

- Press **◀◀** or **▶▶** again.

The display shows:



To revert to normal play

- Press **◀◀** or **▶▶** again, or press **▶**.


Play resumes from the point you scanned to.

To change album on MP3 discs (not G07)

If you are playing an MP3 disc the fast scan keys change to **▼** and **▲**.

- Press **▼** or **▲** to go to the previous or next album.

An album is a folder of MP3 files.



More Programming a selection

The G Series CD and DVD players allow you to programme a selection of tracks, and then play only those tracks you have programmed.

You can programme a selection either by storing the tracks you want to play, or by clearing the tracks you do not want to play. If you programme a selection by storing the tracks you want to

hear, you can play the tracks in any order and repeat tracks in the sequence.

You can programme a selection while the disc is playing, in which case the selection will be played after the current track finishes.

- Press **More** to display the soft keys for programming selections.



Play

To play a selection of tracks

- Program the tracks you want to play, using **Store** and **Clear**.
- Press **▶**.

To clear the programmed selection of tracks

- Press **Home** to display the **■** key.
- Press **■** twice.

The display shows:

C.P.

Store

To make a selection by adding tracks

- Press **◀** or **▶** to select the first track you want to play, and press **Store**.

The display will change from **Track** to **Store**, and all the other tracks will be marked **Clear**.

You should store the first track for a selection within two seconds, or it will begin to play.

Clear

To make a selection by omitting tracks

- Press **◀** or **▶** to select the first track you want to omit, and press **Clear**.

The display will change from **Track** to **Clear**, and all the other tracks will be marked **Store**.

You should clear the first track for a selection within two seconds, or it will begin to play.

Previous/Next

To add or remove a track from a selection

- Select the track using **◀** or **▶**.
- Alternatively you can enter the track number using the **MSR+**.
- Press **Store** to add the track, or **Clear** to remove the track.

Display

Playing CDs

Audio CDs

- Press **Display** to step between the following display options:

Track number and elapsed track time.

6 1:05

Track number and elapsed disc time.

6 31:05

Track number and remaining track time.

6 3:55

Track number and remaining disc time (not G07).

6 28:55

Total number of tracks and total disc time.

12 60:00

MP3 disc display options

The G08 24-bit Upsampling CD Player and G Series DVD players will also play recordable CD-ROMs containing folders of MP3 files, called albums.

- Press **Display** to step between the following display options:

Track number and elapsed track time.

6 0:01:55

Track number and remaining track time.

6 0:03:55

Scrolling display of filename and elapsed track time.

1-02 Puccini

Album number and track number.

3- 6



Playing CDs



Using the radio tuner

This chapter explains how to use the radio tuner, which is available with the G01 Control Unit, G51 Receiver, G68 Digital Surround Controller, and G91 DVD Audio Player Controller Tuner.

The radio tuner provides the AM (LW and MW) and FM wavebands, and supports RDS (Radio Data System) on FM to display the station name.

Home Selecting a station

This section gives information about scanning between radio stations, selecting the wave band, and stepping between preset stations.

- Press **Home** when the **Radio** source is selected to display the soft keys for selecting stations.

Band/Frequency	Station name (if available)	Stereo and preset station
FM 101.9	Classic	Stereo 1
		Band  

Radio

To select the radio tuner

- Press **Home** to display the source options.
- Press **Radio** to select the radio tuner.

Scan down/up

To scan to the next station

- Press  or .
- The tuner will scan down or up in frequency until it finds the next station.

On FM, if the station supports RDS the display will show the station name:

BBC R3

Band

To change the wave band

- Press **Band**.
- You can switch between the following bands:

FM (VHF)

FM 101.3 MHz

MW (Medium Wave)

MW 531 kHz

LW (Long Wave)

LW 290 kHz

In the USA

FM (VHF)

FM 101.3 MHz

AM

AM 531 kHz

Step Previous/Next

To step between preset stations

- Press  or .

Alternatively enter the preset station number using the remote.

The display shows the frequency and preset station number:

99.3 MHz 2

or, if a name has been stored for the preset station, the preset station name:

Classic

For information about defining preset stations see *Tuning manually and defining preset stations*, page 19.



More Tuning manually and defining preset stations

This section explains how to tune manually to a specific frequency, and to define preset stations. You can store up to 30 preset stations each with a name of your choice, and then select them directly from the front panel or MSR+.

- Press **More** to display the soft keys for tuning manually and defining preset stations.



Step ▼/▲

To tune manually

- Press **Step** ▼ or ▲.

This steps through the frequencies in steps of 0.1MHz on the FM band, and steps of 10kHz (AM, USA), 9kHz (MW), and 1kHz (LW).

Store

To define a preset station

- Tune to the station you want to store.
- Press **Store**.

The display shows:

Pick Station

- Press ► to show the first unused preset label:

To select a different preset press ◀ or ▶.

- Press **Store** to store the preset station.

The display shows:

Stored

To edit the label

After storing a preset station the display shows:

Store Label?

- Press **Store** to edit the label or **Return** to exit.

If you selected **Store**:

- Use ▼ or ▲ to change the flashing character, and ◀ or ▶ to move between characters:

BBC R3_

- Press **Store** to store the label.

The display shows:

Stored

Clear

To clear the current preset station

- Press **Clear**.

Audio

To change the audio setting

- Press **Audio**.

You can select between the following settings:

G01/G51

FM: Mono or Stereo.

G68/G91

FM: Stereo, Wide, Medium, Narrow, or Mono. Wide, Medium, and Narrow progressively reduce the stereo width to reduce hiss on noisy stations.

AM: Low Pass, Whistle, or Filter Off. Low Pass removes excess hiss, and Whistle removes 4.5kHz whistle.



Display

• Press **Display** to step between the following display options:

Preset name.

Radio 3

Radio data (G91 only).

BBC Symphony

Genre (G91 only).

Classics

Time (G91 only).

15:36

Note: The information displayed depends on the RDS features supported by the selected radio station, and may take several seconds to appear.



Playing DVD-Video discs

This chapter explains how to play movies on DVD-Video discs using the G Series DVD players.

Home Playing DVD-Video discs

Most DVDs start playing automatically when you close the tray. Some DVDs are double-sided, and need to be turned over during play.

- With a DVD-V in the tray press **Home** to display the soft keys for playing DVDs. With a G91 select the **DVD** source first.

DVD format and sampling rate	Title number	Chapter number	Audio format
DVDV 48k	1	04	5.100
			


Play

To play the disc

- Press **▶**.

The on-screen display shows  and the front-panel display shows the title and chapter, or track number.

For example, on chapter 7 of title 1:



Stop

To stop playback

- Press **■**.

The on-screen display shows: 

To resume after stopping

- Press **▶**.

The disc will resume playing from the position where you stopped playback, and the on-screen display shows: 

To return to the start of the disc

- Press **■** while the disc is stopped.

The on-screen display shows  and the disc is reset to the start.

Pause

To pause playback

- Press **||**.

The on-screen display shows: 

To step forward frame by frame

You can step forward, frame by frame, while a DVD-Video disc is paused:

- Press **||**.

The on-screen display shows: 

To continue after pausing

- Press **▶**.

Previous/Next

To move to the previous or next chapter or track

- Press **◀** or **▶**.

The on-screen display shows  or .

Alternatively you can enter a chapter number using the remote, followed by **Enter**.

Note: These functions are normally disabled while the disc's copyright notice is being displayed.




More Fast and slow-motion playback

You can play back DVD-Video discs faster than normal, at twice or eight times normal speed, or in slow motion, at from one-half to one-sixteenth of normal speed.

Note: The sound is muted when playing back DVD-Video discs faster or slower than normal.

- Press **More** while a disc is playing to display the soft keys for fast and slow-motion playback.

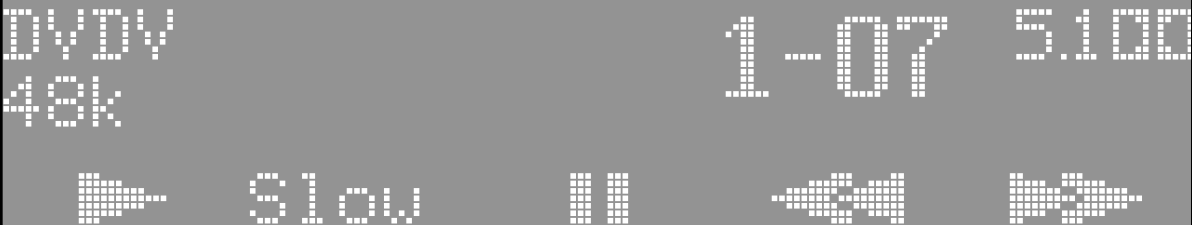

Play

To resume normal speed

- Press ►.

Slow

To play DVD-Video discs in slow motion

- Press **Slow** during playback.
- Each time you press **Slow** the speed switches between one-half, one-quarter, one-eighth, and one-sixteenth normal speed, as shown by the on-screen display:



Pause

To pause while playing at faster or slower than normal speed

- Press ||.

Fast reverse/Fast forward

To play DVDs faster than normal

- Press ◀◀ or ▶▶ during playback.
- Each time you press ◀◀ or ▶▶ the speed switches between twice and eight times normal speed, as shown by the on-screen display:



More Displaying and exiting from menus

DVDs generally provide a Top Menu, which provides access to the contents of the disc.

Many DVD-Video discs also provide a disc menu, which allows you to select additional sections or special options.

This section explains how to display these menus.

- Press **More** while a DVD is playing to display the soft keys for displaying and exiting from menus.

DVDV
48k

1-07

5.100

Return

Top

Menu

Enter

Return

To return from a menu

- Press **Return**.

This will exit from the menu without selecting an option.

Top

To display the Top Menu

- Press **Top**.

Menu

To display the disc menu

- Press **Menu**.

Enter

To select a highlighted option

- Press **Enter**.


If you selected a title on a DVD-Video disc playback will start from chapter 1 of that title.

If you selected a group on a DVD-Audio disc playback will start from track 1 of the group.



More Selecting options from a menu

- Press **More** while a DVD is playing to display the soft keys for selecting options from a menu.
- These keys may automatically appear if the DVD is currently displaying a menu screen, for example when a disc is first loaded.

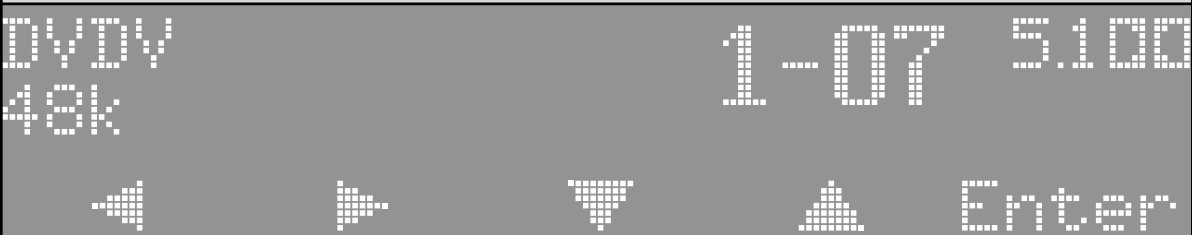

Menu ◀▶

To move left or right on a menu

- Press ◀ or ▶.

Menu ▼/▲

To move down or up on a menu

- Press ▼ or ▲.

Enter

To select a highlighted option

- Press **Enter**.

If you selected a title on a DVD-Video disc, playback will start from chapter 1 of that title.

If you selected a group on a DVD-Audio disc playback will start from track 1 of the group.




More Selecting the audio soundtrack and repeat playback

DVDs often include multiple audio soundtracks, such as movie soundtracks in different languages, or different audio formats.

- Press **More** while a DVD is playing to display the soft keys for audio and repeat.

You can play back a specified title, chapter, track, or selection of a disc repeatedly.

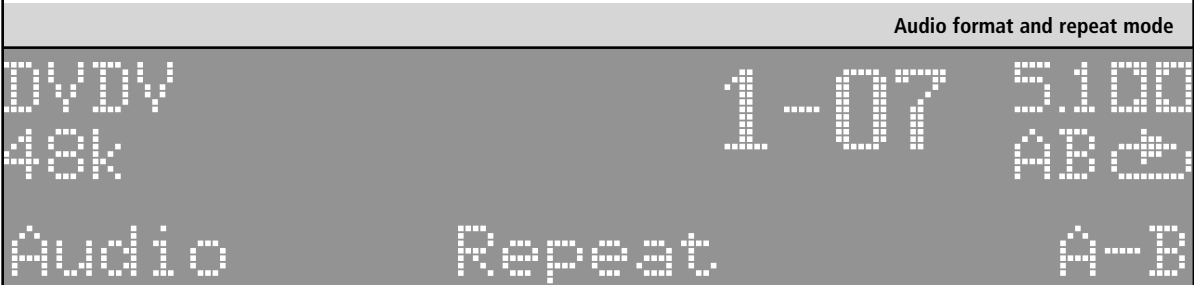

Audio

To select the audio soundtrack

- Press **Audio**.

Each time you press **Audio** the next available soundtrack is selected.

The on-screen display shows the language and audio format of the currently selected soundtrack:



To switch between stereo and multichannel (DVD-Audio)

Some DVD-Audio discs allow you to switch between stereo and multichannel. If this feature is available:

- Press **Audio**.

The DVD player will switch to the alternate format and restart the current track.

Repeat

To repeat a title, chapter, or track

- Select the title, chapter, or track you want to repeat.
- Press **Repeat** to switch between chapter repeat, title repeat, and repeat off.

The current repeat mode is displayed on the on-screen display:



A-B

To repeat a specific section of a disc

- Press **A-B** at the beginning of the section you want to play back repeatedly.

The on-screen display shows:



- Press **A-B** again at the end of the section.

The on-screen display shows:



The DVD player automatically returns to the start of the section and plays it back repeatedly.

To cancel the repeat

- Press **A-B** a third time.



More Changing the camera angle and subtitles

Some DVD-Video discs include scenes recorded from up to nine different camera angles, and you can select the camera angle while you are playing the disc.

Many DVD-Video discs include subtitles in up to 32 different languages. While you are playing a disc you can turn the subtitles on or off, and select the subtitle language from those provided on the DVD-Video disc.

A question-mark symbol is displayed on the on-screen display if you select a function that is not currently available on this disc.

- Press **More** while a DVD is playing to display the soft keys for changing the camera angle and subtitles.



Angle

To select or change the camera angle

- Press **Angle** while viewing a scene with multiple camera angles.

Each time you press **Angle** the next camera angle is selected after a short delay.

The camera angle icon on the on-screen display shows the current camera angle and the total number of angles available:



Subtitle

To select the subtitle language

- Press **Subtitle** or **Function Subtitle** on the MSR+.

Each time you press **Subtitle** the next subtitle language is selected.

The on-screen display shows the subtitle language (for example, ENG, SPA, FRE, or OFF), followed by the subtitle number and total number of languages (for example 2/3):



On/Off

To turn subtitles on or off

- Press **On/Off** or **Subtitle** on the MSR+.

The on-screen displays shows the current subtitle setting:



Display

• Press **Display** to step between the following display options:

Title number and elapsed title time.

6 0:01:05

Title number and elapsed chapter time.

6 0:31:05

Title number and remaining title time.

6 0:03:55

Title number and remaining chapter time.

6 0:28:55

Title number and chapter number.

1-06

Total number of titles and total disc time.

12 1:00:00



Playing DVD-Audio discs

The G Series DVD players can also play DVD-Audio discs, which provide a range of benefits over audio CDs, including higher quality audio, longer playing times, multichannel sound, and supplementary images and videos.

Menu keys Playing DVD-Audio discs

Inserting a DVD-Audio disc and closing the tray typically displays the Top Menu, and the Home soft keys change to the menu keys to allow you to navigate the menus.

Alternatively, press **Play** with the tray open to jump straight to playing the first track in group 1.

Groups

DVD-Audio content can be divided into up to nine groups, similar to titles on Video discs. Each group can contain up to 99 tracks.

Groups can be used to separate content, like high-quality audio from movie sections. Alternatively groups might provide the same content in different formats, such as multichannel and stereo.

Some DVD-Audio discs may contain hidden groups that require a password for access. Follow the instructions given on the disc.

DVDA
96k

0 : 00 : 00

6MLP



Enter

Menu ◀/▶

To move left or right on a menu

- Press ◀ or ▶.

Menu ▼/▲

To move down or up on a menu

- Press ▼ or ▲

Enter

To select a highlighted option

- Press **Enter**.

If you selected a group on a DVD-Audio disc playback will start from track 1 of that group.



More Controlling DVD-Audio discs

In addition to many of the commands shown on pages 24 to 26, DVD-Audio discs have an additional set of commands for still images.

- Press **More** while a DVD-Audio disc is playing to display the soft keys for controlling DVD-Audio discs.

Still images

DVD-Audio tracks often include still images, called pages, which are displayed while the disc is playing. These images may include text or menu buttons. According to the disc these images may be browsable, selected from menus, or change automatically.



Play
To play at normal speed after fast playback
• Press ►.

Page –/+
To display DVD-Audio pages
• Press **Page –** or **+**.
See *Still images* above.

Fast Reverse/Forward
To scan through the disc in reverse or forwards
• Press ◀◀ or ▶▶.
You may hear intermittent sound when scanning fast through the disc to help you locate the section you want.



Display

• Press **Display** to step between the following display options:

Track number and elapsed track time.

6 0:01:05

Track number and elapsed group time.

6 0:31:05

Track number and remaining track time.

6 0:03:55

Track number and remaining group time.

6 0:28:55

Group and track number.

1-06

Total tracks and total group time.

12 1:00:00





Digital surround processing

This chapter explains how to use your G Series digital surround controller.

Home Selecting a source and changing the DSP preset

Each G Series digital surround controller uses advanced digital signal processing techniques to give you superb space-filling sound that makes the most of whatever type of source you are listening to. It achieves this by identifying whether the source is music or a movie soundtrack, and whether it is two-channel or multichannel. It then automatically selects a processing mode, called a DSP preset, appropriate to that source.

For example, if you have selected the CD source and are playing

an audio CD, the **Trifield** DSP preset will initially be selected. You may then wish to choose a different DSP preset, such as **Music** or **Ambisonics**.

You can also change the default DSP preset assigned to the source; see *Assign*, page 36.

- Press **Home** to display the soft keys for controlling your digital surround controller.

Current source		DSP preset		Volume
DVD		Trifield		70
DVD	Radio	TV	VCR1	DSP

Sources

To select a source

Either:

- Press **More** until the source you want to select is displayed.
- Press the key corresponding to the source.

Or:

- Press the appropriate source key on the MSR+.

The display shows the source, DSP preset, and volume setting.

DSP

To change the DSP preset

- Press **DSP** to step between the different DSP presets.

The display shows the current preset; for example:



You will be able to choose any of the DSP presets appropriate to the source you are playing.

For more information about the DSP presets see the next page.

The digital surround controller mutes the sound while changing source or DSP preset, to avoid clicks in the speakers.



DSP presets

Music on CD or radio

The following DSP presets add a surround dimension to stereo recordings, such as on audio CDs or FM radio.

Music extracts the mono and surround components of the original recording for the centre and surround speakers to give a spacious open sound field.

Trifield is similar to **Music** but generates a centre-front signal that is completely integrated with the front stereo image, for a more stable, accurate, and focused stereo image. The image width is also adjustable.

Super produces a very good surround effect with many live recordings.

PLIIx Music and **Music Logic** are recommended for use with studio produced music, and provide different options for adjusting the sound field.

Special presets for two-channel materials

Direct uses only the left and right speakers; compare this with the effect of surround processing using the other modes. **Stereo** will use a subwoofer if it is present.

Ambisonics is specially designed for two-channel materials that are UHJ Ambisonically encoded, such as certain audio CDs. The encoded surround information is recovered and played back using all the loudspeakers in your system. In addition it will give impressive results with other two-channel material.

Two-channel movie soundtracks on DVD, video, and TV

Many movie soundtracks are Dolby Surround Encoded onto a two-channel stereo soundtrack.

The following DSP presets re-create the surround components from this type of material:

PLIIx Movie is Dolby's recommended choice for Dolby Surround Encoded material, and **PLII THX** provides a variant of this better suited to home listening.

TV Logic uses the same processing techniques as **PLIIx Movie** but with adjustable steering to give better results with TV material.

Multichannel movie soundtracks on DVD

The following presets are designed for use with multichannel Dolby Digital or DTS encoded movie soundtracks. Typically these are labelled 5.1 because they provide five full-range channels (three front and two rear) and one LFE (bass effects) channel.

Cinema and **THX** decode the soundtrack to render the original six channels to your speaker layout. **THX** adds some additional signal processing to match the sound to typical home listening conditions.

EX, EZ, THX EX, and **THX Ultra2** create an additional pair of surround channels from the 5.1 channel soundtrack and are available if you have four surround speakers in your system.

Multichannel music recordings on DVD-Audio

The following presets are recommended for music recordings containing more than two channels:

Discrete renders the source channels to your speaker layout with the ultimate precision and transparency.

Ambisonics is especially designed for multichannel recordings on DVD-Audio discs that use Ambisonic encoding.



More Changing DSP parameters

Each DSP preset provides a series of parameters that you can vary to customise the behaviour of the preset to your specific requirements. For example, most presets provide **Balance** and **Depth** parameters to allow you to alter the imaging of the sound field. For each of the built-in DSP presets these parameters are set to standard values, designed to give the best sound in typical listening conditions and with most source materials. Each time

you select a different DSP preset the parameters are reset to these standard values, even if you have previously altered them.

You can also change the DSP preset assigned to a source.

- Press **More** to display the menu keys.

Current source	DSP parameter	Value
CD	Treble	+0.0
◀	▶	▼
		▲ Assign

Menu ◀/▶

To select the parameter you want to change

- Press ◀ or ▶, or **Function** ◀ or ▶ on the MSR+, until the display shows the name of the parameter you want to change.

For example:

Depth +0.5

Menu ▼/▲

To change the value of the parameter

- Press ▲ or ▼, or **Function** ▲ or ▼ on the MSR+, to change the value of the parameter.

As you change the value you will be able to hear the effect on the sound, and the display will show the current value. For example:

Depth +2.5

After a short delay the display will revert to the normal display of DSP preset and volume.

Assign

To assign a DSP preset to a source

- Listen to the source you want to change.

For example, to change the DSP preset used for multichannel movie sources, play a DVD-Video.

The display will show the DSP preset assigned to that source. For example:

DVD Cinema

- Press **DSP** until the display shows the new DSP preset you want to assign. For example:

DVD EX

- Press **More** until you see **Assign**.
- Press **Assign** to save the new assignment.



DSP parameters

Each DSP preset’s parameters allow you to control how it processes the sound. You can adjust these parameters while you are listening to a source to achieve exactly the effect you want. Any changes you make are temporary, and when you select another source the parameters are reset to their standard, recommended values.

If you want to make permanent changes to the DSP parameters for a DSP preset, or create a new DSP preset with your own settings, use the **Store** function. For more information see the *G Series Digital Surround Controller Installation Guide*.

This section describes some of the most useful DSP parameters.

Changing the frequency response

The **Treble** and **Bass** parameters allow you to adjust the slope of the whole frequency response and the bass response respectively. They affect the sound from all channels.

Moving the spatial position of the sound

The **Balance** parameter adjusts both volume and delays for each channel to move the sound to an off-centre listening position. The **Centre**, **Rear**, and **Side Level** parameters adjust the relative level of the corresponding speakers to allow you to move the spatial focus of the sound. For example, the level of the rears can be reduced if they are distracting with music material.

Adjusting the relative delay of each channel

The **Depth**, **R Delay**, and **S Delay** parameters allow you to adjust the delay of the centre speaker, rear speakers, and side speakers relative to the main left and right speakers. Increasing the delay makes the corresponding speaker sound farther away, and reducing it brings the sound closer. These are probably the most important parameters in creating a convincing three-dimensional sound field.

Adjusting the width of the sound field

Trifield and **Super** provide a **Width** parameter which allows you to adjust the width of the image created by the three front speakers.

Using the dynamic range control

The G Series digital surround controllers allow you to take advantage of dynamic range information provided in Dolby Digital sources, such as movies on DVD, to allow you to compress the dynamic range without compromising the sound quality. Useful settings are **Quiet Boost**, which raises the volume of quiet sounds for listening with background noise, and **Loud Cut**, which reduces the level of loud sounds to avoid disturbance, such as for late night listening.

Note: If you are using the digital surround controller with a Meridian DVD player your dynamic range control may be located in the DVD Setup menus; see the *G Series DVD Player Installation Guide* for details.

Changing the absolute phase

The **Phase** parameter changes the phase of the signal to all speakers. This can alter the ambience and bass impact for some material.

Selecting which surround speakers are used

Some DSP presets allow you to select which of the side or rear surround speakers are used, for the best surround effect.

Filtering the surround speakers

On some DSP presets you can also change the low-pass filtering of the surround speakers to avoid distracting high-frequency sounds.



Display

• Press **Display** to step between the following display options:

Source, DSP preset, and volume.

DVD Trifield 70

Source, DSP preset, and THX reference level.

DVD Trifield -22

Source, audio format, and sample rate.

DVD PCM 44k

Other diagnostic displays may appear depending on the configuration of the digital surround controller.



Glossary

Glossary

Absolute phase

A control that changes the phase of the signals to all the speakers. Can alter the ambience and bass impact for some material.

AC-3

An alternative name for the Dolby Digital format.

Ambisonics

A music encoding and decoding system designed to re-create the original sound field using an array of loudspeakers.

Compress

A DSP parameter providing dynamic range control for Dolby Digital sources.

Dolby Digital

A digital surround-sound format which provides five full-frequency-range channels (left, centre, right, left surround, and right surround) and an additional Low Frequency Effects (LFE) channel which is band-limited to 120Hz.

Dolby Surround

The encoding system used for the majority of movies on video and many TV broadcasts. Dolby Surround encoded material can be replayed with a surround decoder connected to an array of loudspeakers, which normally include at least left, centre, right, and rear surround.

DSP preset

A sound processing option. You can create user-defined DSP presets based on the built-in presets, and with specific DSP parameter values.

DTS

Digital Theatre Systems originally produced digital audio tracks for motion pictures. A version of this format adapted for consumer video and audio products is referred to as DTS. Like Dolby Digital it provides five full-frequency-range channels (left, centre, right, left surround, and right surround) and an additional Low Frequency Effects (LFE) channel.

DVD

Digital Versatile Disc, a CD-sized disc with nearly 30 times the storage capacity of CD. It is capable of storing digital video, high-quality multichannel audio, or computer data.

DVD-Audio

A DVD disc containing audio tracks in one or more of a number of alternative formats to provide higher quality or higher capacity than CD, and multichannel audio, together with the option of still images or video. A DVD-Audio disc may also include lower quality versions of the material in DVD-Video format for compatibility with players that do not support DVD-Audio.

DVD-Video

A DVD containing video titles together with one or more soundtracks, menus, and other entertainment features.

Home

The standard set of soft keys for a G Series product.

IR Controller

The product in a Meridian system that has been configured to receive infra-red signals, and where appropriate send them to other products in the system.

Layout

Refers to a particular arrangement of speakers and subwoofers. You can select different layouts for the Logic, Music, and 5.1 Movie DSP presets.

LFE The Low Frequency Effects (LFE) channel which enhances movie soundtracks with extreme bass sound effects up to 200Hz. It is band-limited to 120Hz in a Dolby Digital system. LFE sub A subwoofer which plays the full LFE signal in Dolby Digital, DTS, and MPEG presets. MHR Meridian High Resolution, a proprietary secure encoding format using encryption and anti-copy methods that allows secure transfer of audio streams between elements of a Meridian-only system for the purpose of playback only. It provides a secure copyright protection environment and has the very important benefit of lowering jitter and improving sound quality on all material. MLP Meridian Lossless Packing, an audio format that increases the amount of information that can be recorded without any loss of quality. The reference format for DVD-A material. Mono sub A subwoofer which handles all the bass for the system. A THX standard subwoofer has a crossover at 80Hz.	Mono surrounds Surrounds which have a common signal steered to them. This may then be decorrelated by the THX process to give a more spacious sound. MPEG MPEG Surround is a digital encoding system developed by the Motion Picture Expert Group. Like Dolby Digital it provides five full-frequency-range channels and an additional Low Frequency Effects (LFE) channel. MSR+ The Meridian System Remote. OSD On-screen display, which displays information on status or setup on the video output of a DVD player. PCM Pulse Code Modulation, the method used to encode music digitally, as used on CDs and DVDs. Soft keys The five keys on the front panel of G Series products that change function according to the labels on the bottom line of the display.	Source An input to the system, such as CD or TV. The Meridian G Series provides up to 12 named sources, corresponding to the names of the 12 source keys on the MSR+. Steered surrounds Surrounds which have individual signals steered to them by the digital surround controller's DSP preset. Surround A sound reproducing system with more than two loudspeakers, and usually with speakers behind or to the side of the listener. THX Additional processing that follows Dolby Pro Logic Surround decoding to give a more faithful reproduction of cinema sound in the home. Trifield A DSP preset designed to extract centre and surround signals from a conventional two-channel stereo source.
--	---	---

B

balance, changing 10
balanced analogue system 4
basic use 5
blanking the display 6
brightness, display 6

C

CDs 11
fast scan 13
pausing 12
playing 12
programming a selection 14
repeat play 13
stop 12
CD player 11
configurations, typical 3
control unit. see preamplifier
copying a source 10

D

digital surround controller 33
assigning a DSP preset 36
changing a DSP preset 34
DSP presets 35
DSP preset parameters 36
selecting a source 34
display
blanking 6
brightness 6
changing 6
Display key 6
DSP parameters 37

DSP presets 35
assigning to a source 36
changing 34
parameters 37
DVD-Audio 29
controlling 31
displaying pages 31
fast forward/reverse 31
groups 30
multichannel 26
pages, displaying 31
pausing 22
playing 30
selecting menu options 30
stereo 26
still images, displaying 31
DVD-Video 21
A-B repeat 26
changing the audio
soundtrack 26
changing the camera
angle 27
displaying DVD menus 24
fast forward/reverse 23
pausing 22
playing 22
repeating a title, chapter or
track 26
selecting a chapter 22
selecting a track 22
selecting menu options 25
slow-motion 23
stopping play 22
subtitles, changing 27
subtitles, turning on or off 27

DVD player 21
DVD system 3

F

functions, selecting 6

H

Home key 6
Home soft keys 6

I

introduction 1

M

Meridian Digital Theatre 4
More key 6
MP3 CDs 13
MSR+, using 7
mute 10

O

On/Off key 6
Open/Close key 6

P

preamplifier 9
changing the balance 10
changing the volume 10
copying a source 10
muting the sound 10
selecting a source 10

R

radio 17
avoiding hiss 19
defining a preset station 19
manual tuning 19
scanning 18
selecting a station 18
stepping between preset
stations 18

S

soft keys 6
sources, selecting 10
standby 6

T

tuner. see radio
typical configurations 3

V

volume, changing 10